


Integ E Series

The Power Extender

E2BA-B10K3

High Voltage Battery

- Stacked dual-module structure, for easier installation
- Flexible expansion, scalable to 20.6kWh
- High voltage, high efficiency
- LFP battery cell leads safety & reliable
- Remote fault diagnosis, upgrade and maintenance
- Optional floor or wall mounting
- Stackable modules, plug and play design
- -20°C to 55°C operating range with advanced heating function

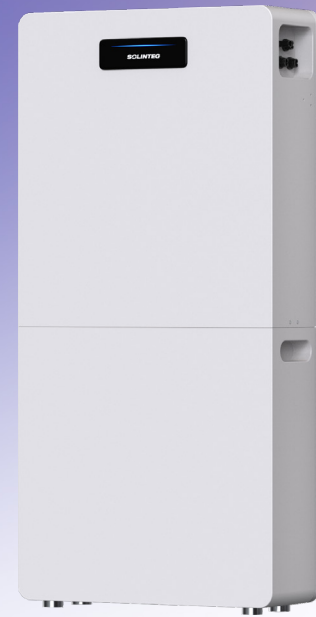

E2BA-B10K3

Specifications	E2BA-B10K3	
Battery Type	LiFePO ₄	
Nominal Energy	[kWh]	10.36
Depth of Discharge	90%	
Rated Voltage	[V]	345.6
Operating Voltage Range	[V]	270~394.2
Max. Charge/Discharge Current	[A]	30
Scalability	1~2	
General Data		
Dimensions	[W×H×D mm]	543×(671+540)×226
Weight	[KG]	54+48
Ingress Protection	IP65	
Installation Method	Floor stacked / Wall-mounted	
Operating Temperature Range	-20~55°C (Charging: -20~55°C, discharging: -20~55°C)	
Storage Temperature Range	[°C]	-30~60
Relative Humidity	5% to 95%, Non-condensation	
Operating Altitude	[m]	< 3000
Cooling	Natural convection	
Display	LED	
Warranty	10 years*	

* Details please refer to related product warranty.